

CamPlus™



Versatile, advanced technology cameras

Innovative PlusPack™ makes it easy to send video over existing transmission networks

The CamPlus™ line of cameras from GE Security uses the latest Digital Signal Processing (DSP) technology to deliver sharp, clear pictures under all conditions. That makes them ideal for a variety of applications, including utility and infrastructure, airport, homeland security, commercial and retail environments.

Every CamPlus features advanced technology to give you better pictures. Digital backlight compensation prevents important foreground objects from becoming lost against bright backgrounds. A variable, high-speed electronic shutter automatically adjusts to changing conditions from low light to bright sunlight, important in outdoor environments like airports, utility stations and transportation hubs that require continuous surveillance.




Every CamPlus camera features a side-mounted control panel so you can easily access the camera's controls without disturbing its field of view.

For the most challenging environments, choose a CamPlus model with Day-Night technology and adjustable gain control for superior low-light performance and sensitivity to infrared light—as low as 0.1 lux. That means you can capture useable surveillance images in near total darkness.

With the innovative PlusPack™ adapter, you can transmit video signals over your existing networks. Simply attach the PlusPack to convert BNC analog output to Unshielded Twisted-Pair (UTP), fiber, RF* or IP* video transmission. This can save considerable time and installation expense. For example, you can transmit video over the existing fiber-optic backbone in a multi-building campus or use UTP phone lines in a department store application.

CamPlus features

- Choice of color, black-and-white and day-nite cameras
- Available PlusPack attachment
- Concealed side-mounted control panel
- Thumbwheel back focus
- 420-600 TV lines resolution (black-and-white), 380-480 TV lines (color)
- 0.01-0.1 lux sensitivity (black-and-white), 0.1-0.5 lux (color)
- Variable high-speed electronic shutter
- Automatic backlight compensation
- Auto-tracking white balance (color models only)
- Accepts C- and CS-mount lenses with manual, video and DC auto-iris control

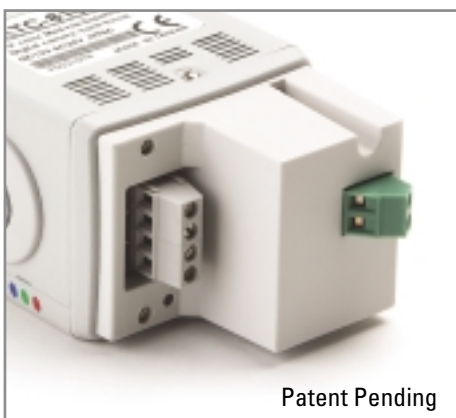

Patent Pending

Simply attach a PlusPack to the back of any CamPlus camera to convert BNC analog output to Unshielded Twisted-Pair (UTP), fiber, RF* or IP* video transmission.



GE Security

Choose the CamPlus model that's right for you

CamPlus features



Side-mounted controls are located under a sliding panel for easier installation and access.



The thumbwheel backfocus lets you make precise adjustments to get the sharpest possible picture.



PlusPack attaches easily so you can transmit images over existing networks



Dual video connectors allow for local video monitor or test monitor adjustments.



Choose from a variety of C- and CS-mount lenses to fit your application perfectly.



The GE logo is your promise of GE quality and support.

A CamPlus camera for every application



KTC-510

- 420 TV lines resolution
- 0.1 lux sensitivity.

KTC-515

- 600 TV lines resolution
- 0.1 lux sensitivity

KTC-540E

- 600 TV lines resolution
- 0.01 lux sensitivity
- Day-Night technology with adjustable gain control

KTC-810C

- 380 TV lines resolution
- 0.5 lux sensitivity

KTC-815C

- 480 TV lines resolution
- 0.5 lux sensitivity

KTC-840CE

- 480 TV lines resolution
- 0.1 lux sensitivity
- Day-Night technology with adjustable gain control

KTC-2000DN

- 570 TV lines resolution (B/W), 480 TV lines (color)
- 0.01 lux sensitivity (B/W), 0.1 lux (color)
- Switches from color to black-and-white in low light
- Day-Night technology with adjustable gain control

PlusPack



Patent Pending

Designed to become part of the camera, the PlusPack attaches easily to the back of any CamPlus model so you can transmit images over your existing networks. With the PlusPack, you can convert BNC analog output to unshielded twisted pair (UTP) fiber, RF* or IP* video transmission.

* Available 2004. See your GE Security dealer for details.



GE Security

North America

toll-free 800-469-1676
tel 541-754-9133
fax 541-754-7162

Latin America

tel 305-267-4301
fax 305-267-4300

Asia

tel 852-2907-8108
fax 852-2142-5063

Australia

tel 61-3-9259-4700
fax 61-3-9259-4799

Europe

tel 32-2-725-11-20
fax 32-2-721-86-13